VISOFOLD 2000 Aluminium Bi-fold Doors

Please tick: Order [ ] Quote [ ]

YOUR CONTACT DETAILS
Company Name:
Address:

Postcode:
Tel: Fax:
Delivery Address:

Postcode:

SINGLE COLOUR
White (RAL 9010) [ ] Other [ ]
RAL No.:

DUAL COLOUR
Internal RAL No.: External RAL No.:

FRAME SIZES
Width (mm)
Height (mm)
Note: You must allow 10mm tolerance between frame and opening size

CILL Included in overall frame height (cill height is 25mm)
150mm [ ]
190mm [ ]
No Cill [ ]

HINGE COLOUR
White [ ] Black [ ]

HEAD PACKER
Included in height [ ]

DEEP BOTTOM RAIL [ ]

Date required:

Your ref/order No.:

OPENING CONFIGURATION
Inward [ ] Outward [ ]

DELIVERY OPTION
Fully assembled [ ]
Kit form [ ]
Glazed (full spec inc spacer bar colour) [ ]
Unglazed [ ]

BOTTOM TRACK DETAIL (see overleaf for details)
Standard outer frame 49.5mm [ ]
Low threshold 12mm (Satin anodised only) [ ]

DRAINAGE REQUIRED
Face (standard) [ ]
None [ ]

MAIN HANDLE COLOUR
White [ ] Black [ ] Gold [ ]
Matt Silver [ ] Chrome [ ]

SHOOTBOLT HANDLE COLOUR
White [ ] Black [ ]

BEAD
Square [ ]

TRICKLE VENTS (in 42mm head packer)
Yes [ ]

Clearly mark on the grid shown the configuration required. The elevation of the door is as viewed from the outside. Mark along the arrows the direction that each panel has to travel.

If you have 2 swing panels, indicate on this drawing which panel you would like to open first (with "FIRST")
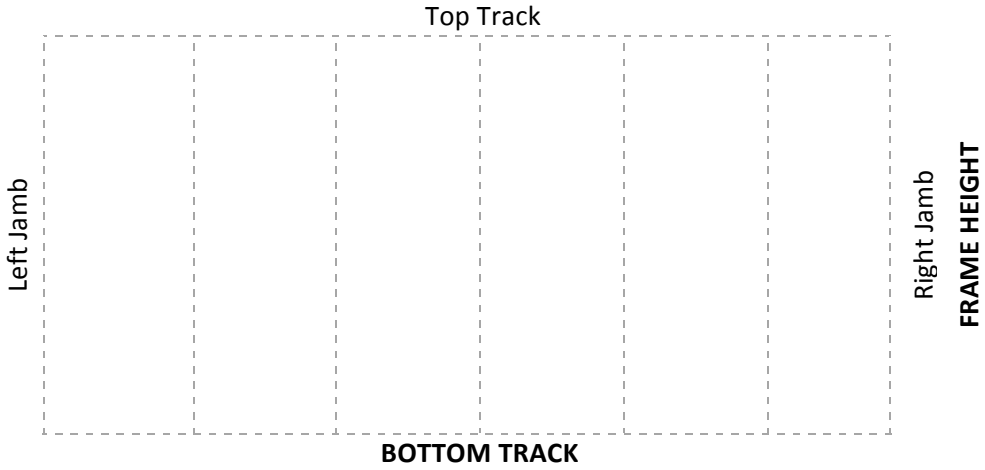
FRAME WIDTH
Top Track